




- Reduces staining
- Eliminates odors
- Brighter laundry
- Protects plumbing
- Corrects acid water conditions*

OXY3™ Series

Iron Reduction System

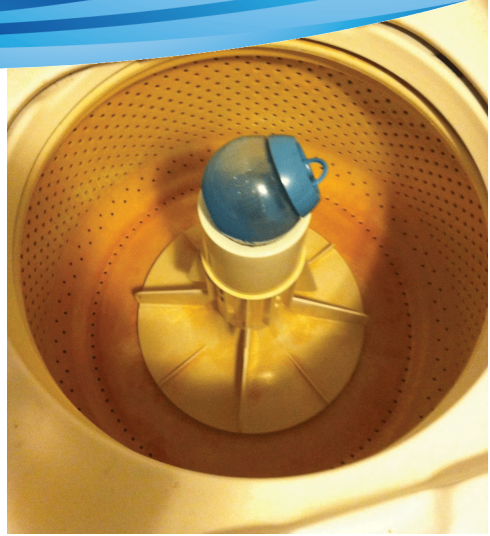

Patent Pending

- **No Chemicals.** A chemical regenerant is not required.
- **No In-Line Venturi to Plug or Adjust.**
- **No Air Compressor.** The noise and expense of compressors are eliminated.
- **No Air Release Valve Required.**
- **Less Maintenance.*** The only maintenance required is the occasional replenishment of media if the raw water pH is below 7. An easy to use fill port is provided.
- **Rugged Mechanical Piston Valve.** No solenoids or flapper valves to stick.
- **Full Flow Bypass Valve.** Simple to use valve allows you to bypass the unit for lawn sprinkling or during filter maintenance.

Model Number	Media cu. ft.	Backwash Rate Required @ 40 psi	Flow Rate (gpm)		Overall Dimensions			Pipe Size
			Peak	Service	L	W	H	
OXY3-10	1.0	5 GPM	10	7	28"	14"	73"	1"
OXY3-15	1.5	5 GPM	10	7	28"	14"	73"	
OXY3-20	2.0	7 GPM	14	9	30"	16"	67"	
OXY3-30	3.0	9 GPM	19	11	39"	18"	85"	

NOTE: Residential OXY3 Filter Systems are not designed for continuous flow applications. (Example: Ground water heat pumps, lawn irrigation, etc.) Specifications subject to change without notice.

* If ordered with "IP10" or "M" suffix

